
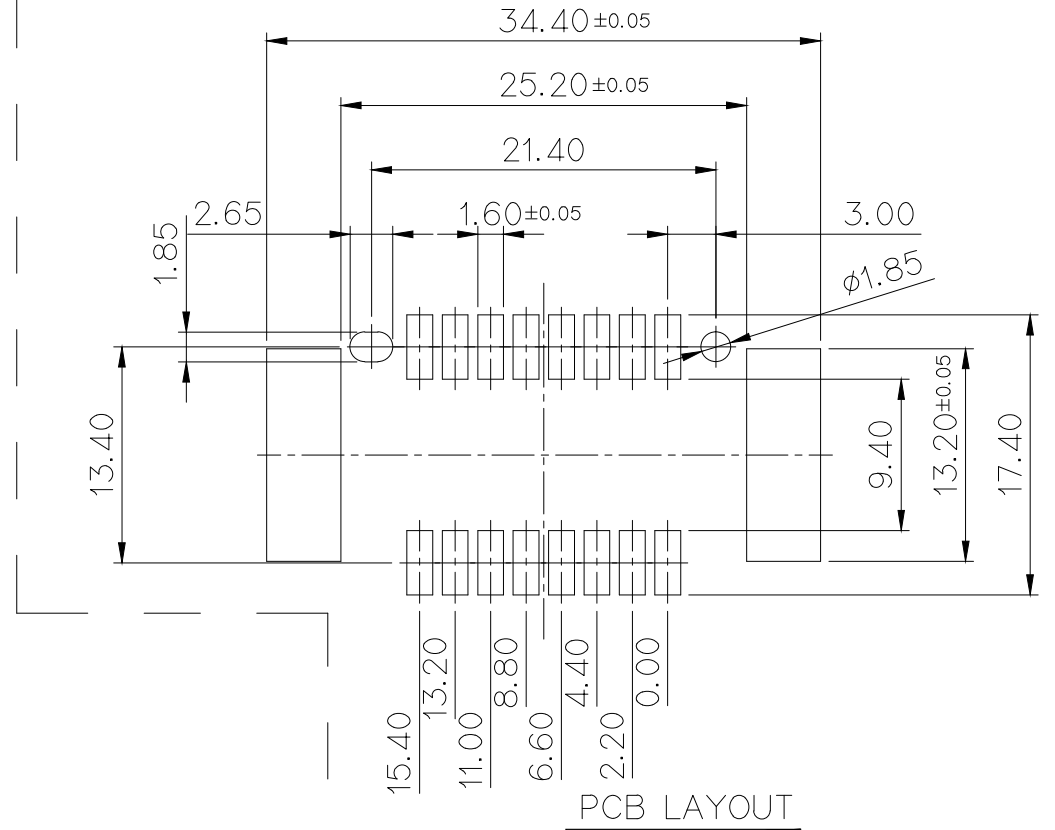
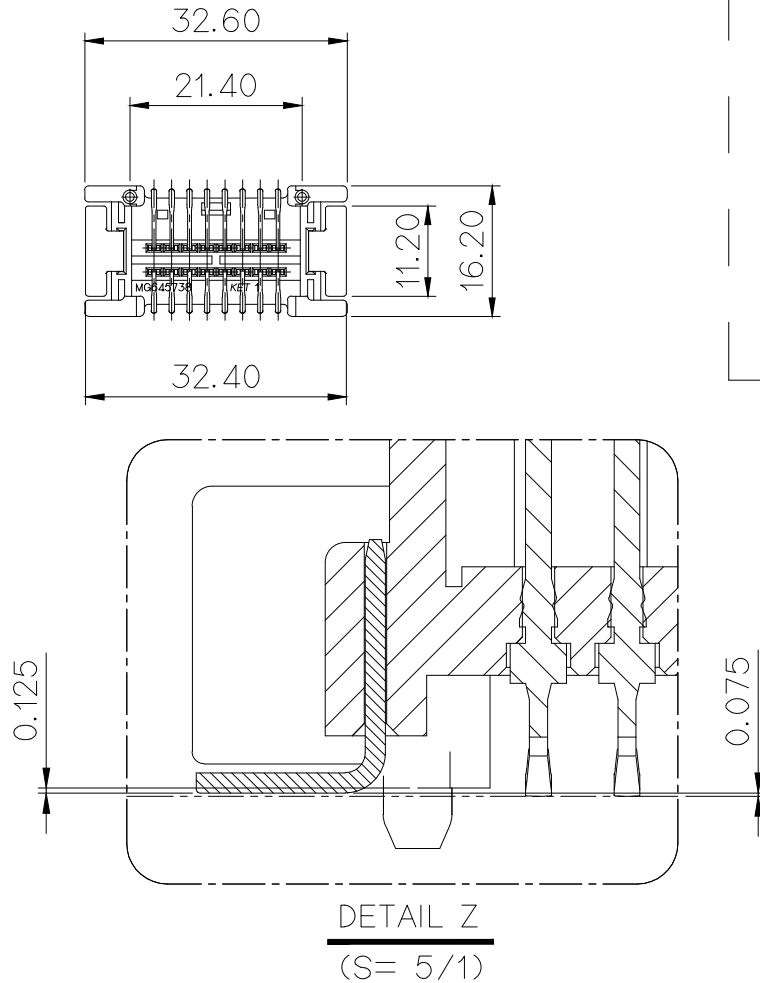
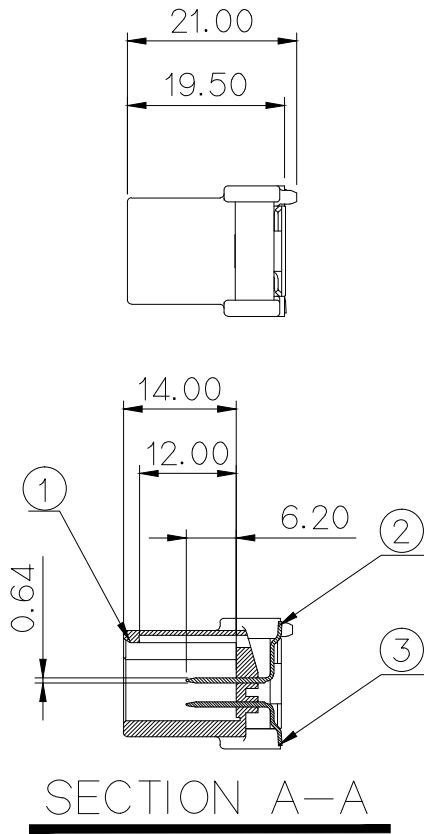
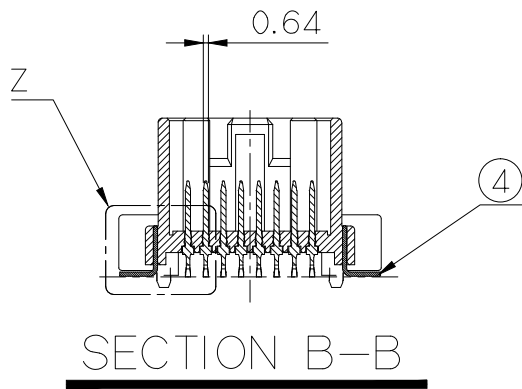
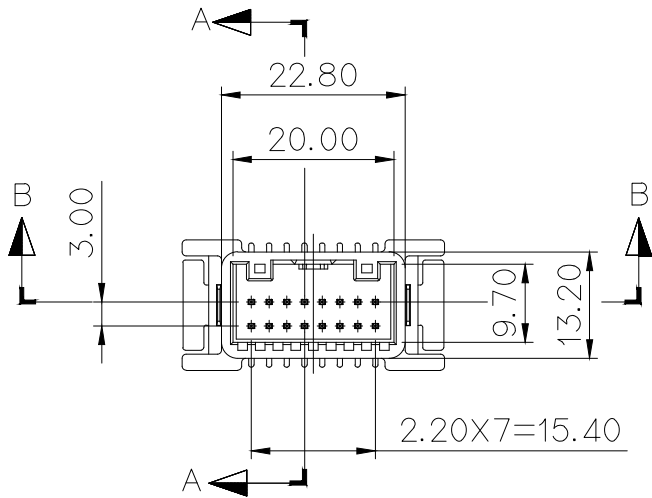


PART NO. △ SEE TABLE

CUSTOMER DRAWING

DIMENSIONS IN MM



부품 구성표

(GENERAL TOLERANCE : ±0.1)

ASSY NO.	△ TM'L 도금사양		포장사양
	표면 처리	Reflow 처리	
MG645738-5	광택	X	PS TRAY+종이 BOX
MG645738-5T			TUBE+종이 BOX
MG645738-5TF	무광택	O	TUBE+종이 BOX

NO.	ASSY NO.	구성품 내역					
		NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY
1	MG645738-5 MG645738-5T	①	025 16M SMD HS'G	MG675815	PPS+GF40%	BLACK	1
		②	025 SMD MALE TM'L (L)	ST792238-2	BRASS	SN 후도금	8
		③	025 SMD MALE TM'L (S)	ST792239-2	BRASS	SN 후도금	8
		④	025 SMD BRACKET	ST792240-2	BRASS	SN 후도금	2
2	⚠ MG645738-5TF	①	025 16M SMD HS'G	⚠ MG675815	PPS+GF40%	BLACK	1
		②	025 SMD MALE TM'L (L)	ST792608-2	BRASS	SN 후도금 (Reflow)	8
		③	025 SMD MALE TM'L (S)	ST792609-2	BRASS	SN 후도금 (Reflow)	8
		④	025 SMD BRACKET	ST792240-2	BRASS	SN 후도금	2

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 적용 FEMALE HS'G : MG655666
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE HS'G : MG655666
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE 025 SMD	
△2	ECO-1411-095 근거 도면 재 작성	JY.K	YSW	BIN	'14.12.05	TOLERANCE EXCEPT AS NOTED		SCALE 1/1	△1 SEE TABLE
△1	ECO-1411-056 근거 도면 재 작성	JY.K	YSW	BIN	'14.11.12	SEE TABLE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE			
DR. YSW '13.08.06		CHK.							
CHK.		APP.		025 16M SMD ASSY					

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 3

ISSUE MARK