

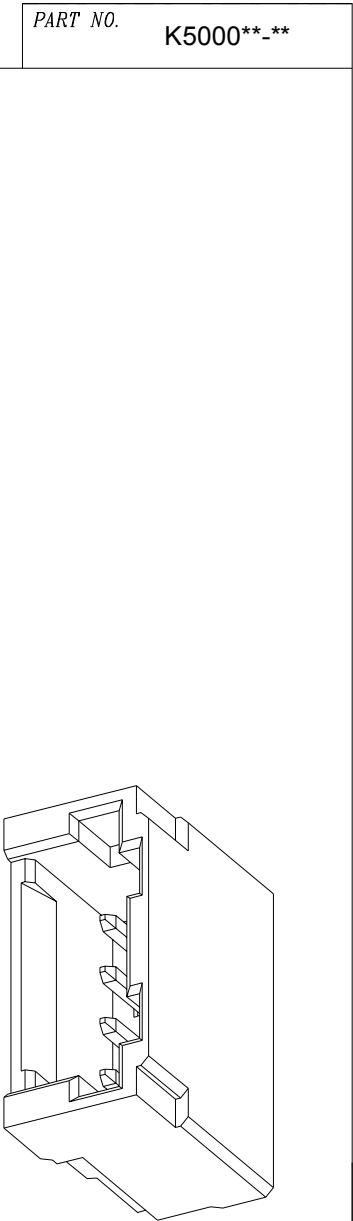






GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

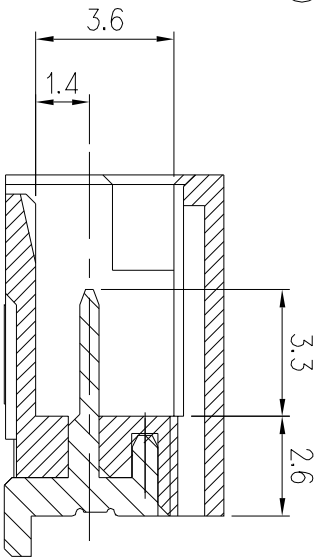

ISOMETRIC VIEW

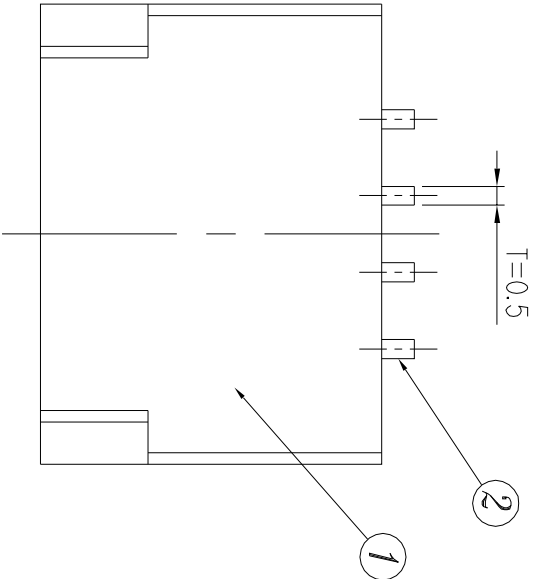


Section A-A"
(Scale 5:1)

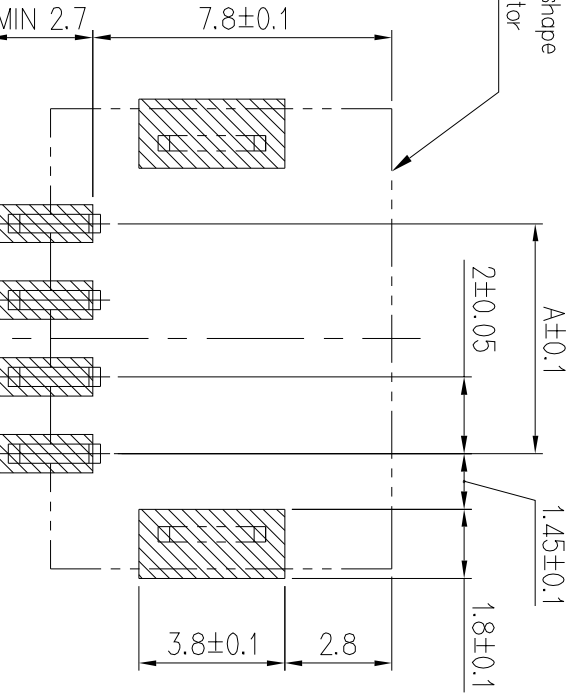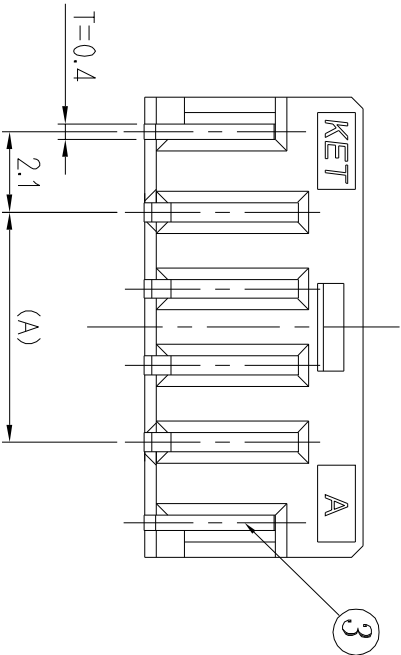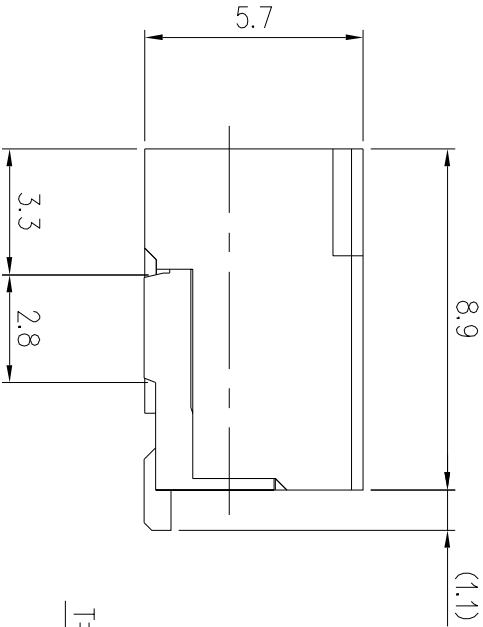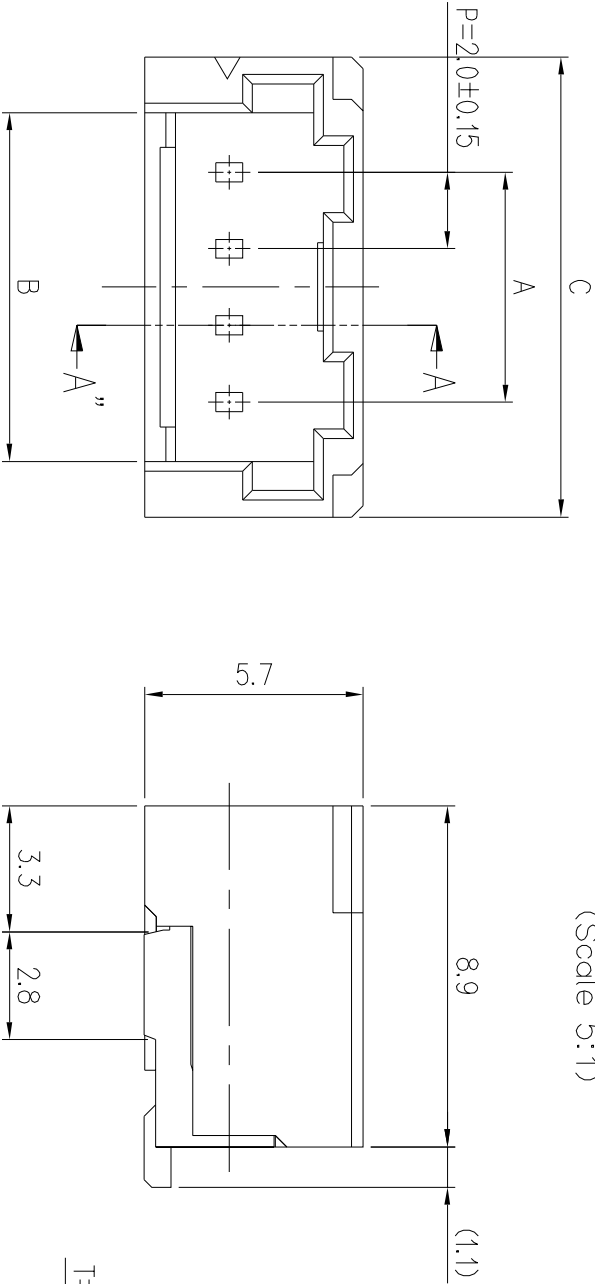

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. LEAD 평탄도 관리 치수 (COPLANARITY OF SOLDER TAILS)

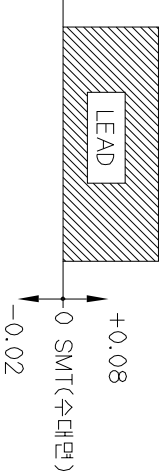

4. 포장재 : EMBOSS TAPE
5. AVAILABLE CIRCUITS

Circuits (N)	Dimensions			Part Information	
	A	B	C	Part No.	Color
					Normal(*) Standard(**)
2	2.0	5.1	8.0	K500024-**-**	2 : Blue02 : Natural
3	4.0	7.1	10.0	K500025-**-**	3 : Yellow03 : Natural
4	6.0	9.1	12.0	K500026-**-**	04 : Natural
6	10.0	13.1	16.0	K500027-**-**	06 : Natural

6. 본 부품은 ES91500-03 형을 만족할 것.



3	METAL FITTING	COPPER ALLOY(t=0.4)	-	Ni+SnP	2	
2	CONTACT	COPPER ALLOY(t=0.5)	-	Ni+SnP	N	
1	HOUSING	NYLON	NATURAL	-	1	

ISSUE MARK



1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNTION.
2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
3. PACKAGE : EMBOSS TAPE

NOTE

CUSTOMER DRAWING

PART NO. K5000**-**

(DIMENSIONS IN MM)