
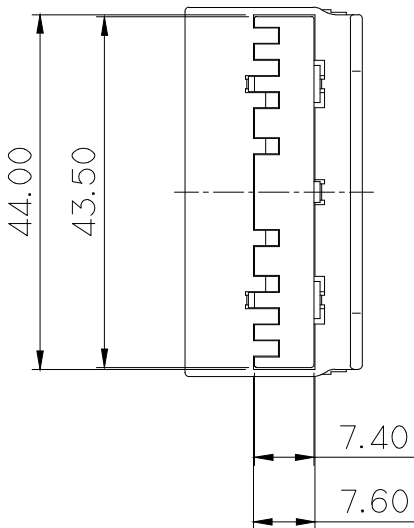
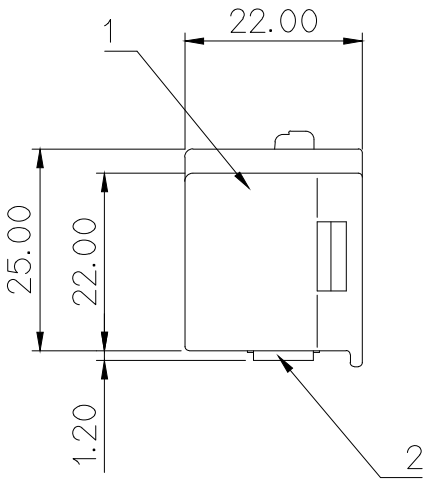
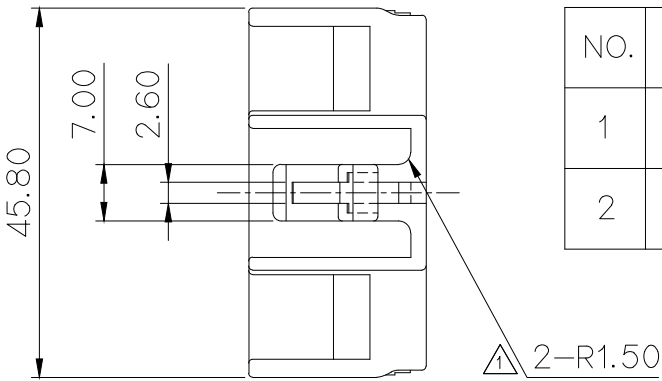




주 기

1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST730644, 645, 646(.187 TYPE: 4EA)
ST730675,676,677 (.090 TYPE : 28 EA)
3. 적용 HOUSING: MG641016
4. SPACER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.
- 5.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

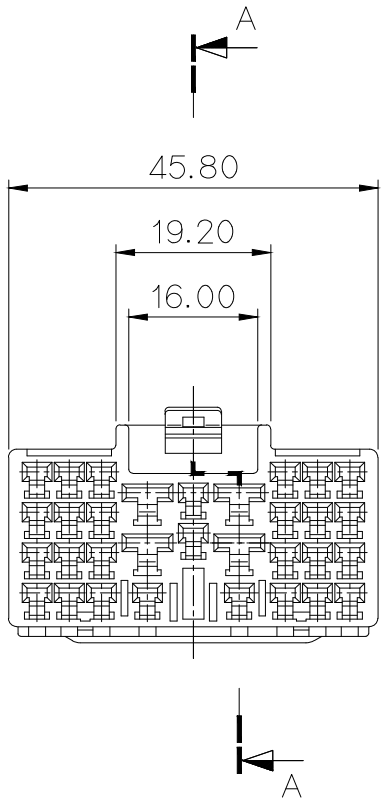

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	REMARK
1	MG671036	DOOR 32P PLUG HOUSING	PBT	NATURAL
2	MG671037	DOOR 32P PLUG SPACER	PBT	NATURAL

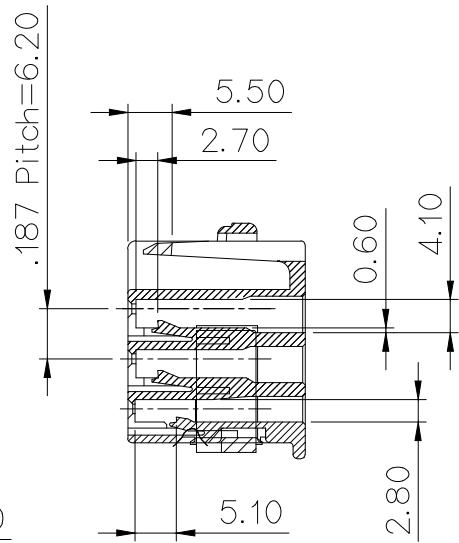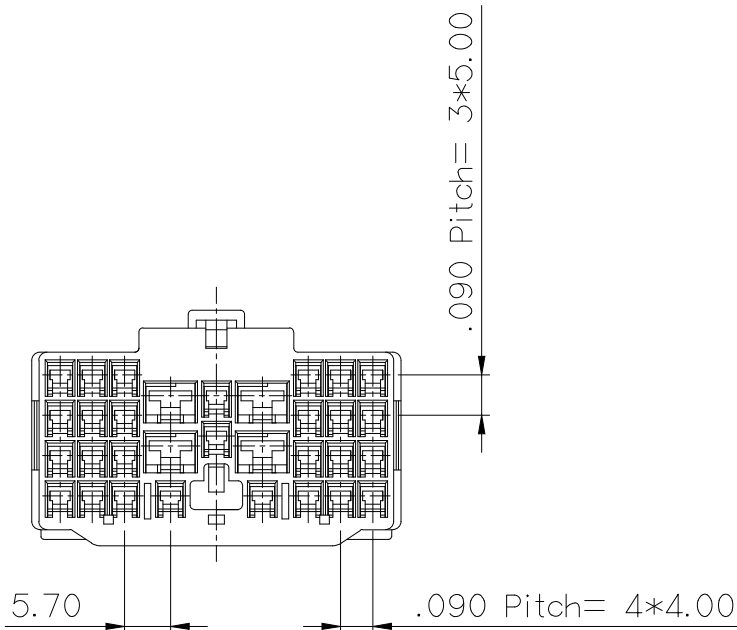

SECTION A-A

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL :ST730644,645,646(.187 TYPE: 4EA)
ST730675,676,677 (.090 TYPE : 28 EA)
3. APPLICABLE HOUSING :MG641016
4. SPACER IS SUPPORT WITH THE 1st LOCK CONDITIOIN.
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

					MATERIAL	SEE TABLE	APPROVED 2018-12-07 KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD. ISSUE MARK	
					FINISH	SEE TABLE		
					WIRE RANGE			
					INSULATION		CLASS	
△	시방변경(010016) 근거 수정	WON		'00.11.29	TOLERANCE EXCEPT AS NOTED		SCALE 1/1	PART NO. MG651013
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SEE TABLE		
DR. WON '96.02.26		CHK.KKJ JJH		3.06		PART NAME		
CHK. JANG		3.07		APP. Watanabe		DOOR 32P PLUG HOUSING ASS'Y		